



Teflon Flat Sole Foot

Item No: **B5002T21A**

Available for:

BLETS8, BLETS8AE, BLES8,
BLE8W-2, BLE8W, BLE8,
BLE8-2, BLE5, BLE5-2,
BLE5-3


This foot is perfect for sticky surfaces such as vinyl, and faux leathers. It also glides smoothly on heavy fabrics like denim and fleece or projects with multiple layers. The teflon flat sole foot moves smoother when it crosses over seams especially on fabrics like vinyl.

The raised markings on the toe of the foot are seam line guides.

They indicate the needle positions to help guide your fabric for accurate seaming.

The presser foot also has a tape sewing slot in the front of the foot. Insert the tape or ribbon, into the slot, then under the sole of the foot.

Needles:	Overlock 1 or 2 Cover/Chain 1,2 or 3
Upper knife:	Engaged or disengaged
Stitch type:	2,3 or 4-thread overlock Single chain, double or triple needle coverstitch
Stitch width:	Any
Stitch length:	Any
Differential feed:	0,6 to 2
Sewing speed:	Normal

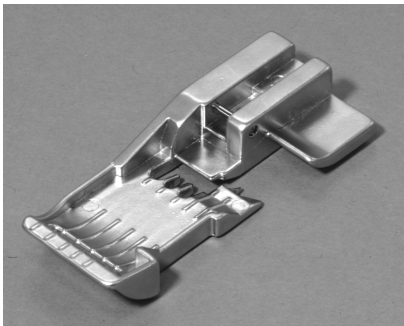

To Release:

1. Raise the presser foot lever.
2. Lower the cutting blade.
3. Raise the needles to the highest position.
4. Push the presser foot release lever located at the back of the presser foot.
5. Carefully turn the presser foot clockwise 90 degrees.
6. Slide the presser foot to the rear to remove.

To Replace:

1. Raise the presser foot lever.
2. Lower the cutting blade.
3. Raise the needles to the highest position.
4. Slide the foot from the left to right.
5. Align the bar of the foot with the groove in the holder.
6. Lower the presser foot lever to snap into place